





iPad 3 4G Dock Connector Replacement

Internal Prerequisite with battery removed

Written By: Brett Hartt

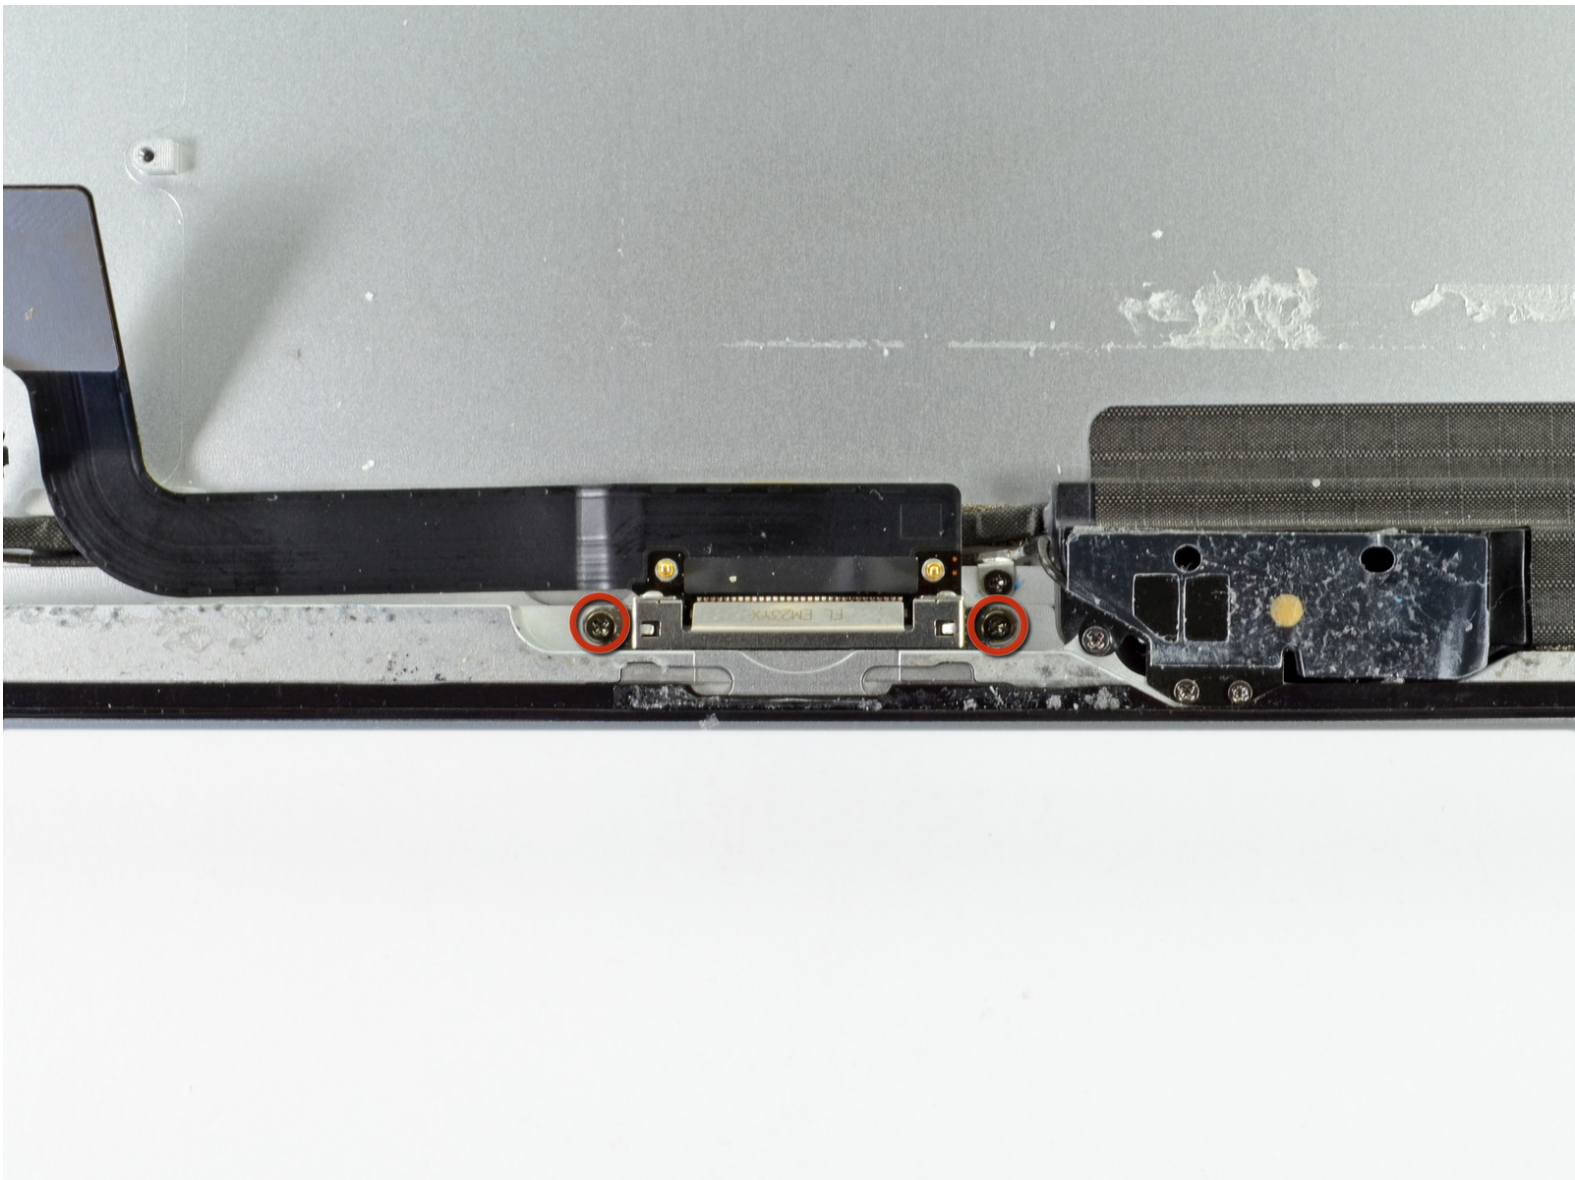


Step 1 — Dock Connector

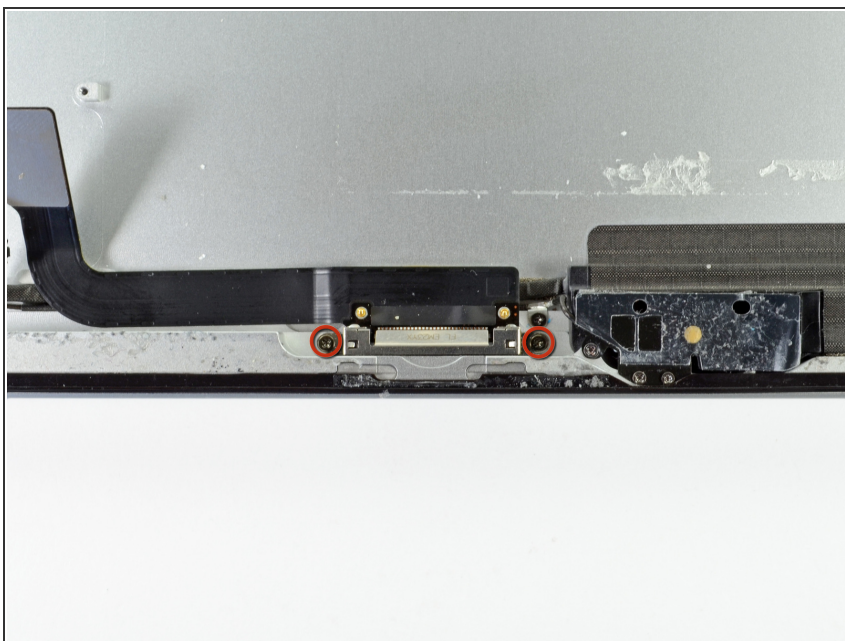

- Remove the two 1.8 mm Phillips #00 screws securing the dock connector to the rear aluminum case.

Step 2

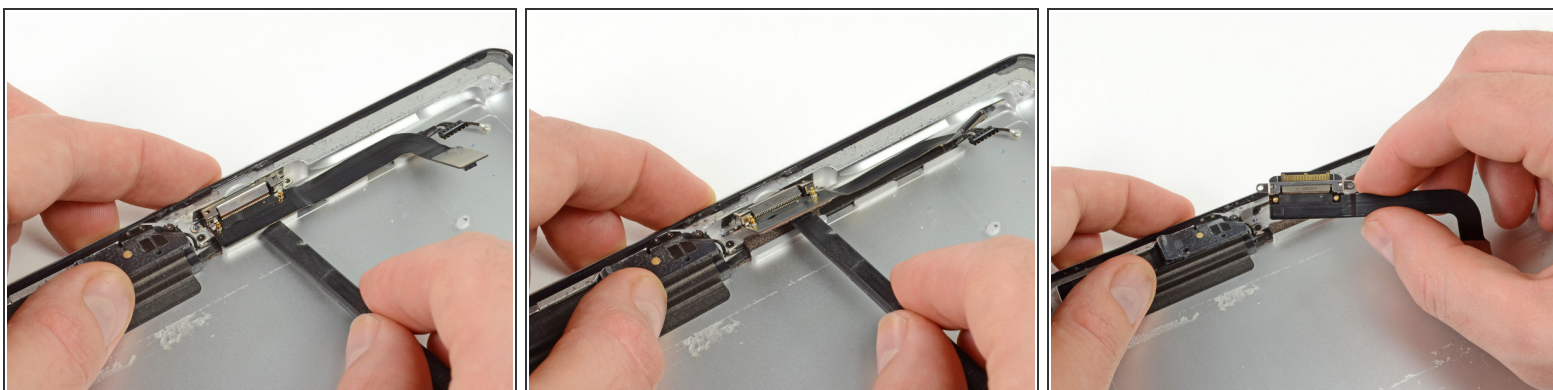

- Using the flat end of a spudger, lift up the dock connector.
- Remove the dock connector from the iPad.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-29 04:02:20 PM.